


# Ergo Zero Console Instruction

New system installation notice: This system can be use for both three legs and two legs. Power off during the installation of handset and controller, the system will recognize the legs number after power on .

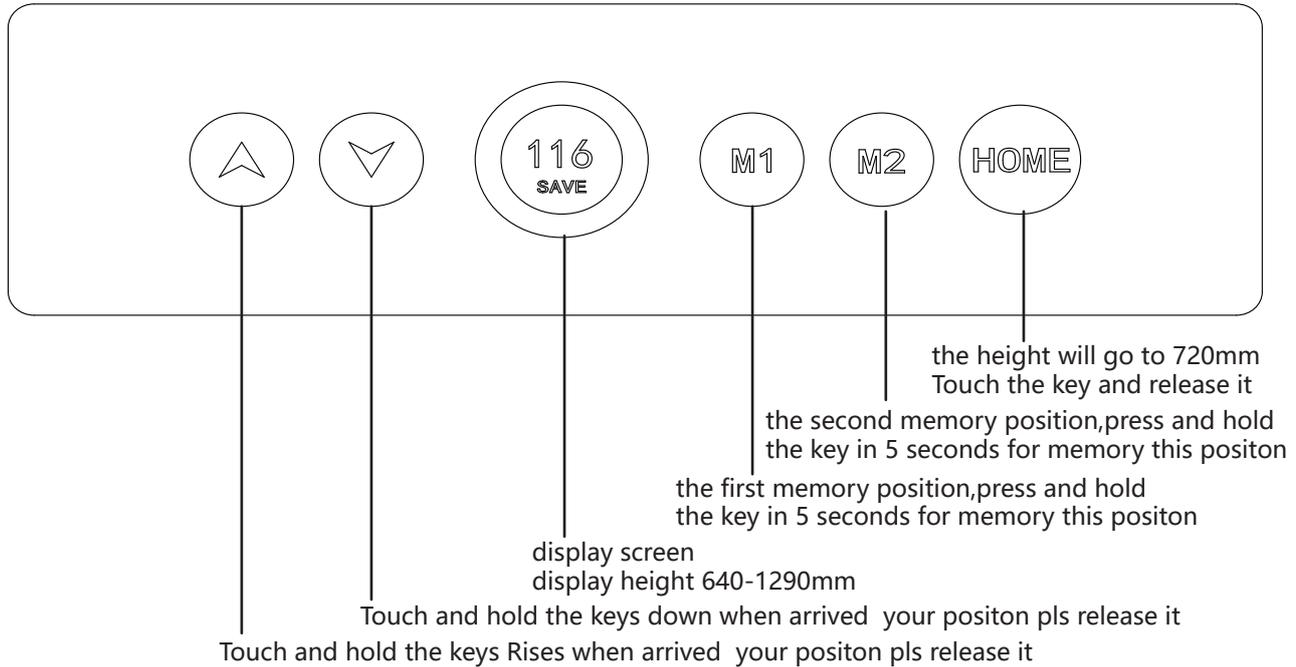

## Mode of operation

- 1.Lightly touch up/down button and hold the key to rise and down the desk height
- 2.Press HOME button quickly release to certain height 720mm to the normal desk height
- 3.M1,M2 press and hold the key in 5 seconds,and sounds "Bi" just memory this position
- 4.30S no touch any button,display screen and all light shot down
- 5.After display screen shot down into locked,M1/M2,HOME can't use anyway, you should touch up or down first,it can be use when the display screen light up
- 6.Installation method have 2 types,if you want to amount on the desktop,The size of the hole should cut at your left or right .

## ERROR ALARM

- Er1** : MOTOR STOP **Solution**: restart after power off, if the problem no solved, means the motor is damaged
- Er2** : Over 5 cm Height difference between two legs **Solution**: A, Press home key for 5 seconds,into mode A setting, retreat setting after select setting number 4 ,next downing desk at its button height ,then reset the system .  
B, Diagnosis the motor or leg as default when it still not working after doing the solution A.
- Er3** : wire loose or disconnection **Solution** : inspect the wire connection checking if not connect well or losing, or the wire is broken
- Er4** : Communication problem **Solution** : check the handset and control box are complete connected, cut off the power supplier, If error still exist,means the control box or handset is damaged.

- 1, When desk operation loading weight less 70 kg, the desk can keep working for 5 minutes, screen show"hot"
  - 2,When desk operation with loading weight more than 70 kg, the desk can keep working 3 mintues, screen shows"hot"
  - 3,After the screen show"hot", press any key will not working, the handset can automatically reworking after 5 minutes.
- PS**: Connecting the control box to handset, the handset start to buzzer 3 seconds showing connecting starts.

## Hot display

# Adjustable options

